



SERIES ELDA


ELDA HS ELDA 60
ELDA HT ELDA 90
 ELDA 130

Model		HS10	HT10
Water tank capacity	L	-	200
Maximum Outlet Temperature	°C	75	
Power	Maximum current absorbed	13.10	
	Voltage/Frequency	220-240V~/50Hz	
	Maximum input power	3	
Digital connectivity	Wi-Fi		
	IP Class	IPX1	
	Screen	Écran Tactile Couleur de 7 Pouces	
Type of tank material	-	-	Duplex
Noise level at 1m		30	31
	Connection ACS Tank	G1	G1
	Connection Heating/Cooling	G1	G1
Dimensions and connections	Liquid refrigerator connection	G1 1/4"	
	Net weight	35	125
	AxFxH	418x310x750	640x750x1950


Model		ELDA 60 NE-F60HCR5INVMV2	ELDA 90 NE-F90HCR5INVMV2	ELDA 130 NE-F130HCR5INVMV2
Maximum water outlet temperature	°C	75		
Operating range	°C	-25-43		
Ambient temperature (DB/WB): 7°C/6°C Water temperature (inlet/outlet): 30°C/35°C	Heating capacity	2.00-6.03	3.50-9.04	4.20-13.04
	Power Absorbed	0.34-1.27	0.60-1.98	0.72-2.84
	Current Input Range	1.49-5.50	2.64-8.70	3.13-12.47
	COP	5.88-4.75	5.83-4.57	5.85-4.59
Ambient temperature (DB/WB): 7°C/6°C Water temperature (inlet/outlet): 50°C/65°C	Heating capacity	1.82-6.05	3.15-9.03	3.70-12.95
	Power Absorbed	0.46-1.92	0.81-3.01	0.96-4.35
	Current Input Range	2.02-8.43	3.56-13.22	4.21-18.91
	COP	3.96-3.15	3.89-3.00	3.85-3.02
Ambient temperature (DB/WB): 35°C/- Water temperature (inlet/outlet): 12°C/7°C	Heating capacity	1.47-4.91	2.33-6.96	3.27-9.13
	Power Absorbed	0.34-1.60	0.54-2.23	0.75-2.99
	Current Input Range	1.49-7.03	2.37-9.79	3.41-12.95
	COP	4.32-3.07	4.31-3.12	4.34-3.06
Ambient temperature (DB/WB): 20°C/15°C Water temperature (inlet/outlet): 15°C/55°C	Heating capacity	6.61	9.33	13.45
	Power Absorbed	1.52	2.14	3.11
	Current Input Range	6.67	9.40	13.65
	COP	4.35	4.35	4.32
Heating/Electricity	Maximum input power	3.00	3.00	3.00
	Maximum input current	14.30	19.80	22.2
ErP Level (35°C)/(55°C)	%	A+++		A++
Power	Voltage/Frequency	220-240V~/50Hz		
	Maximum input power	2.08	4.5	5.4
	Compressor	MITSUBISHI		
Components	Water Heat Exchanger	Plate Heat Exchanger		
	Air Heat Exchanger	Échangeur de Ailettes		
	Maximum permissible pressure	3.5		
Pressures	Operating Pressure (Low)	0.9		
	Operating Pressure (High)	3.0		
	Water pressure loss	15	20	22
	IP Class	IPX4		
Sound level at 1 m	dB(A)	38	42	44
Refrigeration	Gas/Charge/GWP	R290/0.75/3	R290/0.9/3	R290/1.05/3
	Liquid coolant connection	G1 1/4"		
Dimensions and connections	Nominal water flow rate	1.03	1.55	2.20
	Net weight	130	135	180
	AxFxH	1102x557x1021		1377x557x1021

Dimensions (mm)


ELDA HS

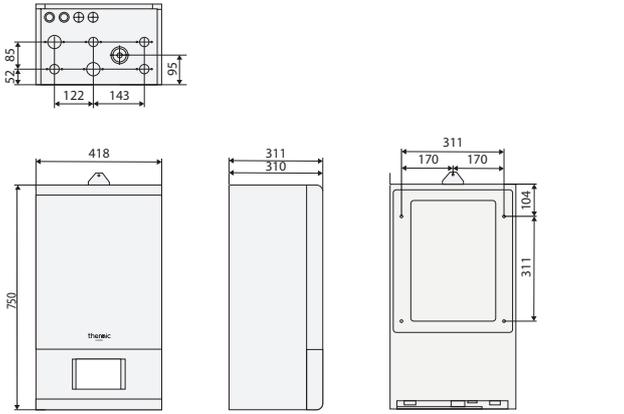

ELDA HT

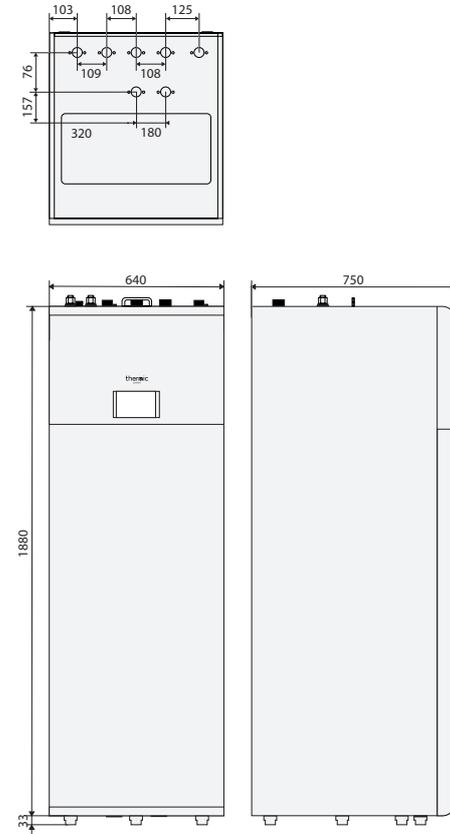

ELDA 60 | 90 | 130

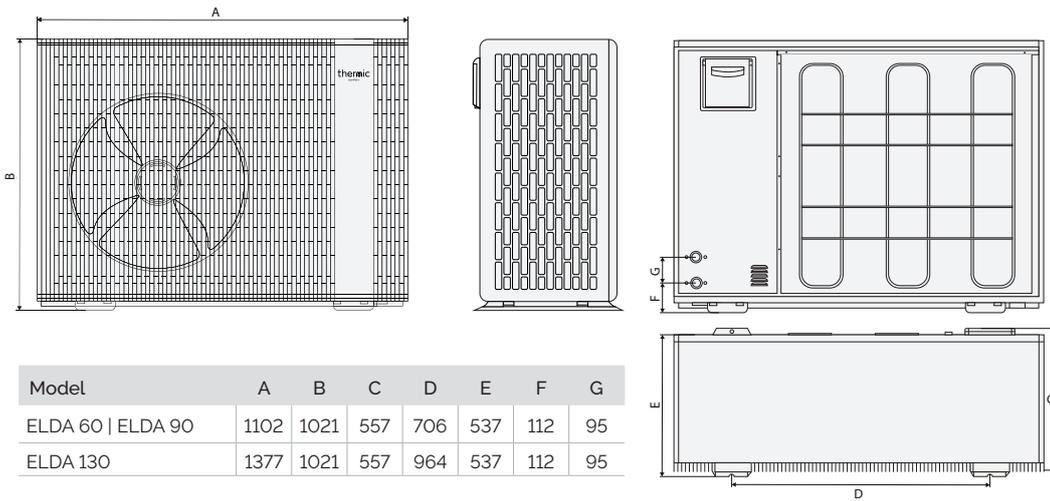

Model	A	B	C	D	E	F	G
ELDA 60 ELDA 90	1102	1021	557	706	537	112	95
ELDA 130	1377	1021	557	964	537	112	95